

Linkage Bracket Product Manual





Table of Contents

- Warranty 4
- Introduction..... 5
- Parts Included 5
- Installing the Linkage Bracket 6
- Using the Linkage Bracket at the top opening of the eBox..... 9

DISCLAIMER

- While every effort has been made to ensure that the information contained in this guide is accurate and complete, no liability can be accepted for any errors or omissions.
- OR Technologies reserves the right to change the specifications of the hardware and software described herein at any time without prior notice.
- No part of this guide may be reproduced, transmitted, transcribed, stored in a retrieval system or translated into any language in any form, by any means, without the prior written permission of OR Technologies.
- OR Technologies makes no warranties for damages resulting from corrupted or lost data due to a mistaken operation or malfunction of the camera, the software, the OR Technologies lighting systems, personal computers or peripheral devices.



Linkage Bracket Manual

Please make sure the system arrives in perfect condition and all parts are included. Contact us immediately if there is any damage or if you are missing any parts.

ONE YEAR WARRANTY

Defective components will be replaced during the 12 month warranty period. No charge will be made for labor costs during this period. Proof of purchase must be provided to verify the warranty status. Shipping is not included.

Introduction

Thank you for choosing the Professional Linkage Bracket for the new lighting systems from OR Technologies. This manual allows you to understand how to use this high quality accessory in the following systems:

- Photo eBox II
- Photo eBox Bio
- Photo ebox Plus
- Photo ebox Plus 1419

** Remember that this accessory will work **ONLY** for the new version of this boxes with bar holders on the left side (Usually the boxes that had been made after June 2012). If you have an older model of Photo eBox, we also offer a **RETROFIT KIT** for more information please contact us at 1-800-258-6230.*

Parts Included



(1) Linkage Bracket



(4) Set Screws



(1) Allen Key



(1) Nylon washer with thumb screw



(2) Vinyl Caps



(1) 1/2" Diameter Steel Bar

- *Note: Accessories and parts included may differ from pictures on this manual, please check our website (www.mkdigitaldirect.com) for the most up-to-date information.*


Installing the Linkage Bracket

Please read each of the steps and look at the images for visual guidance. Some of the newest eBoxes have the Linkage Bracket already installed.


- Identify the parts.
The new version of the boxes listed before came with bar holders on the left, please verify that your box has this feature.



- Slide the vertical ½ inch **STEEL BAR** inside the **TOP BAR HOLDER** and before reaching the **BOTTOM BAR HOLDER**, slide the **LINKAGE BRACKET** first and then slide the **NYLON WASHER** with the thumb screw.

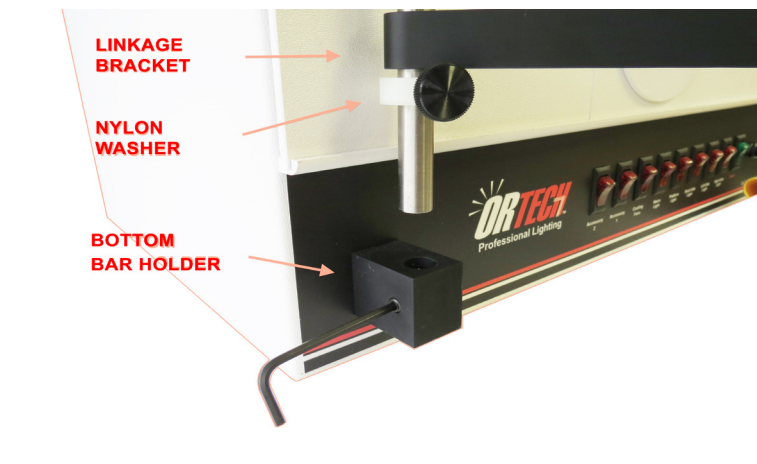

- Slide the ½ inch **STEEL BAR** inside the **BOTTOM BAR HOLDER** , then tight it gently with the **4 SET SCREWS** (two for the **BOTTOM BAR HOLDER** and two for the **TOP BAR HOLDER**) using the supplied **ALLEN KEY** (Please do not over tight).

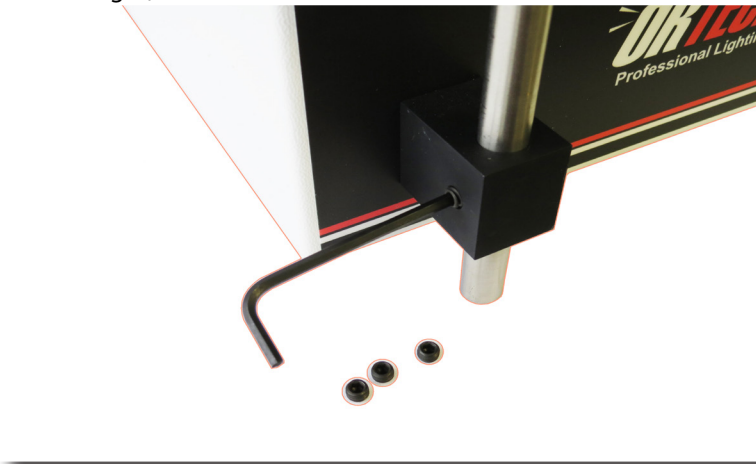

- The final assembly should look like this picture. Please remember to reinstall the vinyl caps at the ends of the steel bar.



- Mount your camera on the **LINKAGE BRACKET** by screwing it on the 1/4 inch mini ball head located at the end of the bracket (clockwise direction). Hold tight your camera with one hand and screw the mini ball head with the other.



- The camera mounted on the **LINKAGE BRACKET** should look like the following picture.



Using the Linkage Bracket at the top opening


The Linkage Bracket can be moved to the top of the Lighting System so you can photograph items from that angle without any difficulty or effort.

Please read each of the steps and look at the images for visual guidance


- Dismount your camera from the **LINKAGE BRACKET** by unscrewing the 1/4 inch mini ball head located at the end.



- Unscrew the **4 SET SCREWS** (two on the **BOTTOM BAR HOLDER** and two on the **TOP BAR HOLDER**) using the supplied **ALLEN KEY**.

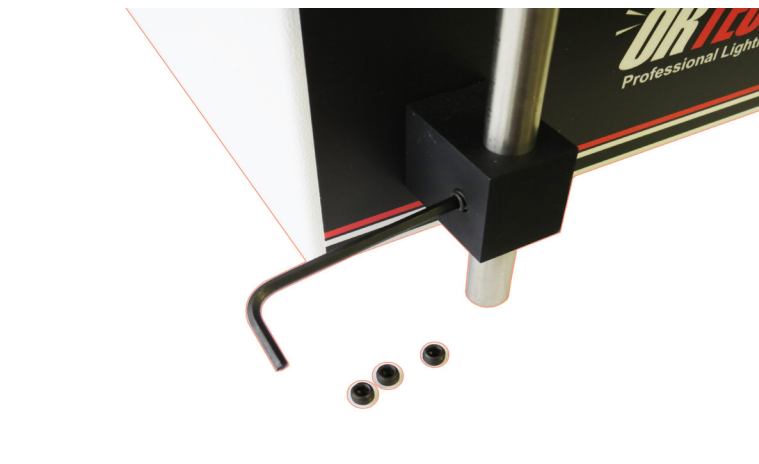

- Slide out the vertical ½ inch **STEEL BAR** from the **BOTTOM BAR HOLDER** and then take out the **NYLON WASHER** with the thumb screw and the **LINKAGE BRACKET** respectively.

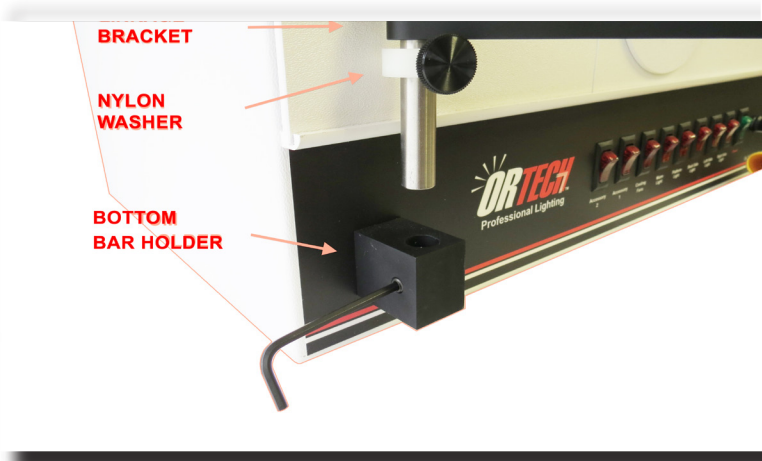

- Once you have detached the **LINKAGE BRACKET** and the **NYLON WASHER**, you need to reinstall the **STEEL BAR** back to the original position and tight it with the **4 SET SCREWS** (two for each **BAR HOLDER**). Please do not over tight.



- Now, Slide the **NYLON WASHER** with the thumb screw first, then slide the **LINKAGE BRACKET** on top of the **STEEL BAR** and reinstall the vinyl caps at the ends of the steel bar.



- Mount your camera on the **LINKAGE BRACKET** by screwing it on the 1/4 inch mini ball head located at the end the final assembly should look like the following picture.





www.mkdigitaldirect.com | info@mkdigitaldirect.com

Tel: (619) 661-0628 | Toll Free: (800) 258-6230

**861 Harold Place Suite 209,
Chula Vista, California 91914**